

Optical Module

WS-PII56(65)6L-xD (10Gb/s 60km SFP+ T1270/1330nm R1330/1270nm)



Performance Characteristics

- ◆ Hot Pluggable
- ◆ Single LC interface, Duplex operation
- ◆ 1270nm/1330nm DFB transmitter, APD receiver
- ◆ Power consumption <1.5W
- ◆ Applicable for 60km SMF connection
- ◆ Single +3.3V power supply
- ◆ All-metal housing for superior EMI performance
- ◆ Cost effective SFP+ solution, enables higher port densities and greater bandwidth
- ◆ Operating Temperature: 0 to +70°C -40 to +85°C
- ◆ RoHS compliant (lead free)

Applications

- ◆ 10GBASE-ER/EW
- ◆ Other optical links

Standards

- ◆ IEEE 802.3ae 10GBASE-ER/EW
- ◆ SFF-8431/SFF-8432
- ◆ SFF-8472

Description

This 10Gbps SFP+ BIDI transceiver is designed to transmit and receive optical data over single mode optical fiber for link length 60km.

The SFP+ BIDI 60km module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI.

■ Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Power Supply Voltage	Vcc	-0.5		4	V
Storage Temperature Range	Ts	-40		85	°C
Relative Humidity - Storage	RHS	0		95	%
Relative Humidity - Operating	RHO	0		85	%

■ Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Case Operating Temperature Range	Tc	0	-	70	°C
		-40	-	85	
Power Supply Voltage	Vcc	3.14	3.3	3.47	V
Supply Current	Icc	-	-	450	mA
Data Rate	BR	-	10.3125	-	Gbps


■ Electrical Characteristics

Transmitter Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Differential Input Voltage Swing	VIN	180	-	700	mV
Tx Differential Input Impedence	ZIN	-	100	-	Ω
Transmitter Disable Voltage	VDIS	2.0	-	VCC+0.3	V
Transmitter Enable Voltage	VEN	0	-	0.8	V
TFAULT Logic High	VTFH	2.4	-	VCC	V
TFAULT Logic Low	VTFL	VEE	-	VEE+0.4	V
Receiver Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Differential output Voltage Swing	VOUT	300	-	850	mV
Rx Differential Output Impedence	ZOUT	-	100	-	Ω
LOS Assert Voltage	VLOSA	2.4	-	VCC	V
LOS De-assert Voltage	VLOSD	VEE	-	VEE+0.4	V




1. Average power figures are informative only, per IEEE 802.3ae.
2. Measured with 231-1 PRBS@10.3125Gbps,BER<10⁻¹²

Pin Definitions

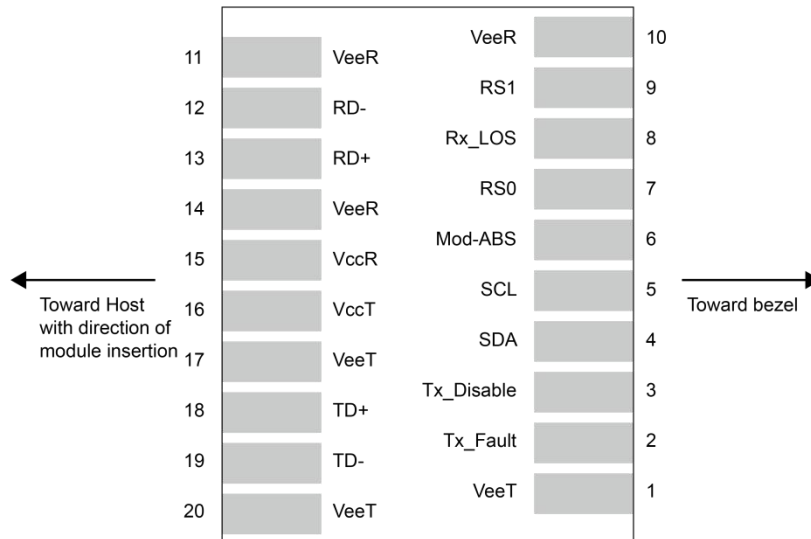


Pin	Symbol	Description	Notes
1	VEET	Transmitter Ground	1
2	TFAULT	Transmitter Fault	2
3	TDIS	Transmitter Disable. Laser output disabled on high or open	3
4	SDA	2-wire Serial Interface Data Line	2
5	SCL	2-wire Serial Interface Clock Line	2
6	MOD_ABS	Module Absent. Grounded within the module	
7	RS0	Rate Select 0. Not Used.	4
8	RX_LOS	Loss of Signal indication. Logic 0 indicates normal operation	2
9	RS1	Rate Select 1. Not Used.	4
10	VEER	Receiver Ground	1
11	VEER	Receiver Ground	1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground	1
Notes			
1. Circuit ground is internally isolated from chassis ground. 2. Shall be pulled up with 4.7k-10k Ohms to a voltage between 3.15V and 3.6V on the host board. 3. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V. 4. Internally pulled down per SFF-8431 Rev 4.1.			

■ Recommended Interface Circuit

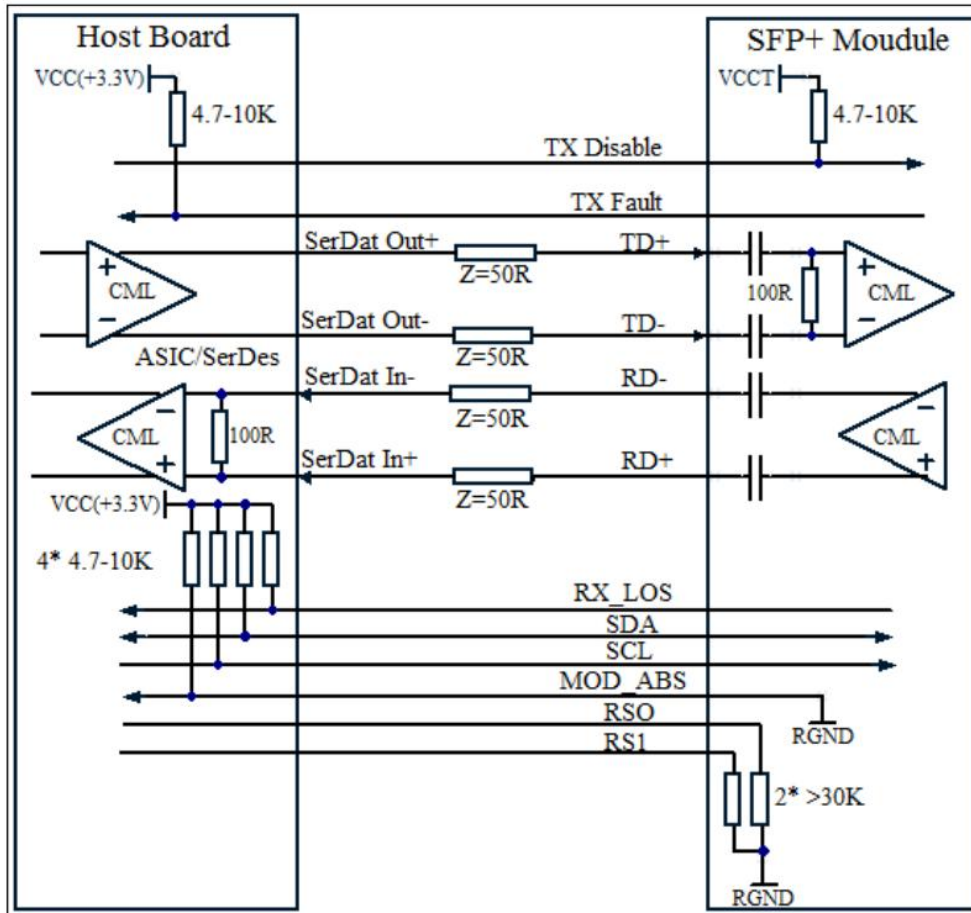

■ Recommended Host Board Supply Filtering Circuit

The Transceiver includes internal circuit components to filter power supply noise. Under some conditions of EMI and power supply noise, external power supply filtering may be necessary. If receiver sensitivity is found to be degraded by power supply noise, the filter network illustrated in the following figure may be used to improve performance. The values of the filter components are general recommendations and may be changed to suit a particular system environment. Shielded inductors are recommended.

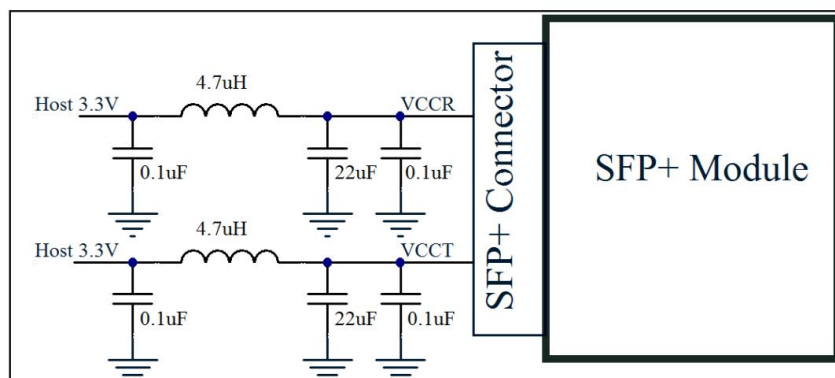





■ Ordering information

Part Number	Product Description
WS-P11566L-ID	SFP+ BIDI Tx1270/Rx1330nm, 10.3125Gbps, SM, 60km, -40°C~+85°C, With DDM
WS-P11566L-SD	SFP+ BIDI Tx1270/Rx1330nm, 10.3125Gbps, SM, 60km, 0°C~+70°C, With DDM
WS-P11656L-ID	SFP+ BIDI Tx1330/Rx1270nm, 10.3125Gbps, SM, 60km, -40°C~+85°C, With DDM
WS-P11656L-SD	SFP+ BIDI Tx1330/Rx1270nm, 10.3125Gbps, SM, 60km, 0°C~+70°C, With DDM

■ Mechanical Dimensions



Units in mm

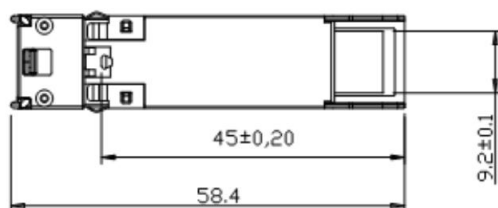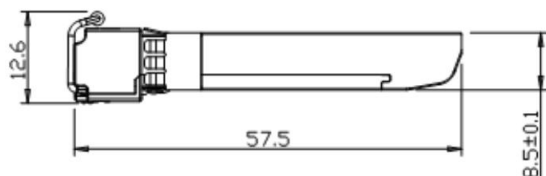

■ Package Dimension



Carton (400pcs) 10.5kg

Note: The specific packing box size is determined according to the quantity ordered by the customer.